

DIFFERENT TYPES OF CONVEYORS



**DIVERSION
CONVEYOR**



**STRETCHABLE
ROLLER CONVEYOR**



**TRUCK LOADING
BELT/ROLLER CONVEYOR**

Range of Packing Materials from SHIVAGANGA PACK



**HAND SEALING
MACHINE**



**PP BOX STRIPPING
ROLL**



**BAG CLOSER
SEWING MACHINE**



**NYLON & COTTON
THREADS**



**SELF ADHESIVE
BOPP TAYPES**



SHRINK FILMS



STRETCH WRAP FILE



AIR BUBBLE FILE ROLL



**BOPP SELF ADHESIVE
TAPE 12mm to 75mm**



**PP STRAPPING
ROLL 5mm to 19mm**



SHIVAGANGA PACK

DISTRIBUTOR OF TIWAN PACKAGING MACHINES

**ONE SOURCE FOR ALL KINDS OF
PACKAGING SOLUTIONS**



**Automatic Integrated shipper Packaging System
of Cheek Weighing Semi Automatic Carton Erector
Top and Bottom Shipper Center Sealing, Four Side
Edge (Corner) Sealing and Fully Automatic Strapping
Machine**



SHIVAGANGA PACK

Behind SP Office, 3rd Cross, Siddalingaiahana Palya, Tumkur - 572 103.

Mob.: +91 7411783555, 7760133075, 7204196661

E-mail : info@shivagangapack.com | Web : www.shivagangapack.com



SEMI AUTOMATIC STRAPPING MACHINE HEAVY DUTY



Made in Taiwan



PW311H

Specifications

| | |
|---------------------|-------------------------|
| Power Supply | : 220V, AC Single Phase |
| PP Strap width | : 6-15 mm |
| Min. Strapping Size | : 60 mm |
| Max. Strapping Size | : No Limit |
| Strapping Speed | : 1.5 (Sec./Strap) |
| Volume (LxWxH) | : 795 x 545 x 690 |
| Weight of Mchine | : 90kg. |
| Max. Tension | : 100kg. |

Specifications

| | |
|---------------------|-------------------------|
| Power Supply | : 220V, AC Single Phase |
| PP Strap width | : 6-15 mm |
| Min. Strapping Size | : 60 mm |
| Max. Strapping Size | : No Limit |
| Strapping Speed | : 1.5 (Sec./Strap) |
| Volume (LxWxH) | : 895 x 565 x 730 |
| Weight of Mchine | : 100kg. |
| Max. Tension | : 120kg. |



HIGH SPEED AUTO TAPING AND STRAPPING COMBINATION MACHINE



PORTABLE ELECTRIC INDUSTRIAL SEWING BAG CLOSER GK 26-1A



VERTICAL STRAPPING MACHINE



RANDOM TYPE CARTON SEALING MACHINE FOR DIFFERENT BOX SIZES

AUTOMATIC STRAPPING MACHINE



Standard Chute Size
850(width)x600mm height


- ❖ The brush guiding mechanism ensures the strapping at the proper position and not to slant. Brilliant performance.
- ❖ Rapid speed 2.4 sec/per cycle, 25 cycles/per min.
- ❖ Easy maintenance : No greasing, Mechanism is stable and durable, Easy operation.
- ❖ Tension Adjustment can be adjustable at will, max. tension is over 90 kgs.

FULLY AUTOMATIC STRAPPING MACHINE



Technical Data

| | |
|------------------------|------------------------------|
| Strap type | : Poly Propylene |
| Strap Width | : 8-12 mm |
| Strap Thickness | : 0.55-0.75 mm |
| Strap Tension | : 7-70 kgs |
| Straps / minute | : 30 |
| Conveyor Speed | : 30mtr/min |
| Standard Arch size | : 850(width)x600mm(height) |
| Electrical Requirments | : 110V,220V,230V 50/60Hz 1PH |
| Machine Net wt. | : 220 kgs |
| Strap Function | : Single, Double & Multi |

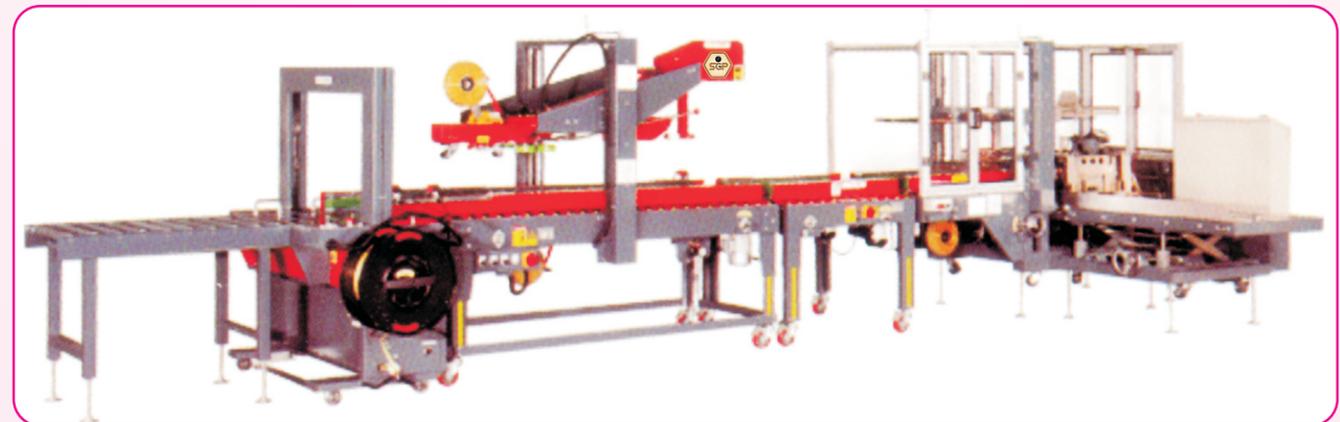

FULLY AUTOMATIC STRAPPING MACHINE WITH AUTO FLAP CLOSER CORTON SEALING MACHINE AND EDGE TYPE CORNER TAPING SYSTEM



**SINGLE CHAMBER
VACUUM PACKAGING
MACHINE**



**DOUBLE CHAMBER
VACUUM PACKAGING
MACHINE**



TP-702-59



**CORRUGATED
BUNDLE SQUARING AND
STRAPPING SYSTEM
TP-702 CCQ**



PW316L

**Floor Model Semi Automatic
Strapping Machine**

Floor Model Strapping Machine widely used for Packaging of above 45kgs weight and moderate volume products.

Specifications

Power Supply : 220V, AC Single Phase
 PP Strap width : 6-15 mm
 Min. Strapping Size : 60 mm
 Max. Strapping Size : No Limit
 Strapping Speed : 1.5 (Sec./Strap)
 Volume (LxWxH) : 1200 x 565 x 300
 Weight of Mchine : 100kg.
 Max. Tension : 120kg.



**Battery Powered
Strapping Tools**

The high strap tension of these portable plastic, PET strapping tools permits the processing of plastic straps up to a width 9mm to 19mm and a thickness of 1.35mm. The Heavy polyester straps permit the problem-free replacement of the traditional steel straps and result in considerable savings.



**Pneumatic Strapping
Tools**

These stationary strapping machines facilitate perfect strapping of packaged goods in the most diverse industries and for a multitude of strapping applications. These are suitable for use with PET straps up to a thickness of 1.35mm and achieve a very high strap tension.

40 ABM

**CARTON SEALING MACHINE
HEAVY DUTY**



Model No. 40 ABM

CARTON SIZES

Length : Min. 150mm Max. Unlimited
 Width : Min. 150mm Max. 450mm
 Height : Min. 120mm Max. 550-mm

Specifications Machine Dimensions :
L: 1230, W: 670, H: 1535

Sealing Speed : 20M/Min (20 boxes/Min)
 Tape width : 2", 2.5" & 3" optional
 Core Diameter : 76MM
 Power requirement : Two Motors of 0.25HP (0.36 kw)

50 FAM

**AUTO FLAP CLOSING
CARTON SEALING MACHINE
HEAVY DUTY 35BOXES/Min**



Product Features

- ❖ Four flap closer.
- ❖ Belt speed of 35 boxes/minute as per international norms.
- ❖ Consistent overlap of tape results in consumable saving.
- ❖ Quick and easy adjustment between batches of different carton sizes.


Product Specifications*

Length.....2100 mm
 Width.....700 mm
 Height.....1600 mm
 Weight.....250 kg
 Motors.....1 ph. 220V, 180 Watts - 2 Nos.
 Power.....360 Watts
 Air Consumption0.8 Lts/Cycle at 5 Kg/Cm2

* Manufacturer reserves the right to alter the specifications without prior notice



**BOX WRAPPING MACHINE
WITHOUT TOP PLATE WITH FREE
STRETCH UPTO 200% - 300%**

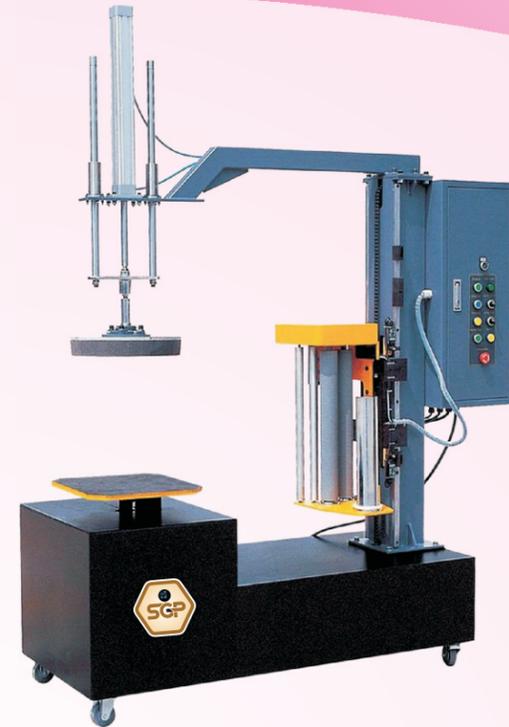

**BOX STRETCH WRAPPING MACHINE
WITH POWER PRE- STRETCH
WITH TOP PLATE 200% - 300%**



**BOX TAPING AND STRAPPING
SYSTEM COMBO**



**AUTOMATIC BOX STRAPPING
MACHINE WITH
H LOW TABLE**



SHRINK CHAMBER



SHRINK TUNNEL MACHINE

Shrink Wrap Tunnels, heat and circulate air around products wrapped with shrink films. Their air handling systems generate air turbulence around the whole object for uniform film shrinkage.

These powerful units can manage mid to high production schedules and will speed up any shrink packaging process simply and efficiently.



**SLEEVE WRAPPER WITH
SHRINK TUNNEL**

Sleeve wrapper and tunnel shrinking system designed to wrap a wide variety of packs, either as individual packs, or as collations. Two rolls of film are sealed in the middle, creating a single curtain of film. Apply for productions such as bottled water, Beer, Soft drinks etc.

Quick fitting pneumatic fittings for easy connection and maintenance.

Schneider/Telemecanique electrical devices.

Sealing bar with blade for smooth sealing

Maximum Production Speed Range. 5-8 ppm

Working Area Height : (Depends on selected Models)

Three Phase Supply 220V/50-60Hz.

Air Pressure: 6 - 8 Kg/cm³



BAND SEALING MACHINE



STRAP DISPENSER